

Grade 1 Exit Devices PD9200 Series



Overview

The PD9200 Series are heavy-duty exit devices for the most demanding doors. Available as Rim Panic-Rated (PD9200R), Surface Vertical Rod Panic-Rated (PD9200V), Rim Fire-Rated (PDF9200R), and Surface Vertical Rod Fire-Rated (PDF9200V). These devices are recommended for use on exterior and interior out-swinging doors.

Compliance

- PD9200
 - ANSI/BHMA A156.3 2014 Grade 1
 - UL listed Panic Hardware
- PDF9200
 - ANSI/BHMA A156.3 2014 Grade 1
 - UL10C fire-rated exit hardware, UL305 and UBC7-2, 3-Hour

Applications

- Hospitals
- Office Spaces
- Schools
- Industrial Sites
- Government Buildings
- Places of Assembly



Panic: SA7474
Fire: R26113



Grade 1 Exit Devices, PD9200 Series

Standard Features


Latch	Rim: Deadlocking latch, stainless steel $\frac{3}{4}$ " throw Vertical Rod: Top latch is stainless steel $\frac{5}{8}$ " throw, deadlocking pullman type; Bottom latch is panic-rated stainless steel $\frac{5}{8}$ " throw, deadlocking pullman type. Fire-rated version has round slide bolt). Easy latch adjustment for vertical rods.
Device Lengths, Rim	36" (32 $\frac{7}{8}$ " actual length; can be cut back to 26" from head cover to end cap) 48" (44 $\frac{5}{64}$ " actual length; can be cut back to 33" from head cover to end cap)
Device Lengths, Rim Fire Rated	36" (32 $\frac{7}{8}$ " actual length; can be cut back to 24" from head cover to end cap) 48" (44 $\frac{5}{64}$ " actual length; can be cut back to 30" from head cover to end cap)
Handing	Non-Handed
Material	Stainless Steel, Brass, Extruded Aluminum
Strike	For Rim, surface applied (double door strike available) For Vertical Rod Strikes, surface applied top, mortise required for bottom strike
Door Types	Commercial wood and hollow metal
Door Prep	Surface application, plus trim prep Door height for Vertical Rod is standard 7'0" with optional top rod set for 8'0" and extensions available for up to 10'0" Top and bottom rods have vertical adjustors in the center case.
Dogging	Standard dogging by key provided or $\frac{5}{32}$ hex wrench Cylinder dogging option available (Requires a 1 $\frac{1}{4}$ " Mortise Cylinder with Cloverleaf Cam) Fire-Rated Devices cannot be dogged
Door Thickness	1 $\frac{3}{4}$ " - 2 $\frac{1}{4}$ "
Stile Width	Minimum 2 $\frac{7}{8}$ "
Projection	Pushbar Neutral: 3 $\frac{13}{16}$ " Pushbar Depressed: 3 $\frac{1}{16}$ "
Keying	Outside trims use conventional mortise or rim cylinders (not included)

Grade 1 Exit Devices, PD9200 Series

Designs



PD9200R Rim Exit Device
Shown in 613 Finish

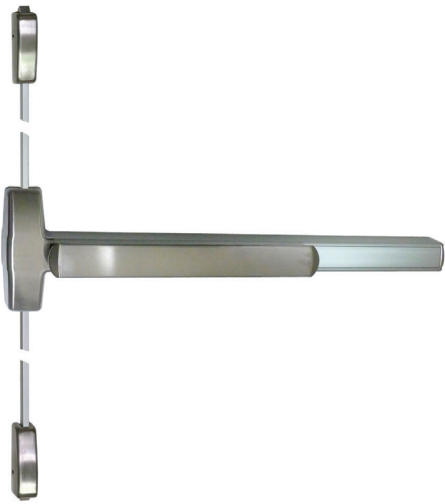

PD9200V Vertical Rod Exit Device
Shown in 630 Finish

Grade 1 Exit Devices, PD9200 Series

Finishes



Handing

